


ECOSYS MA2100cwfx: A classic, redefined

With the new ECOSYS MA2100cwfx, we have transformed a hugely popular legacy device, making it the perfect fit for the new age of work. This compact and highly reliable A4 printer combines the best of Kyocera's ECOSYS technology with modern innovation to meet the needs of the most demanding workspaces, be they in the office or across remote locations.

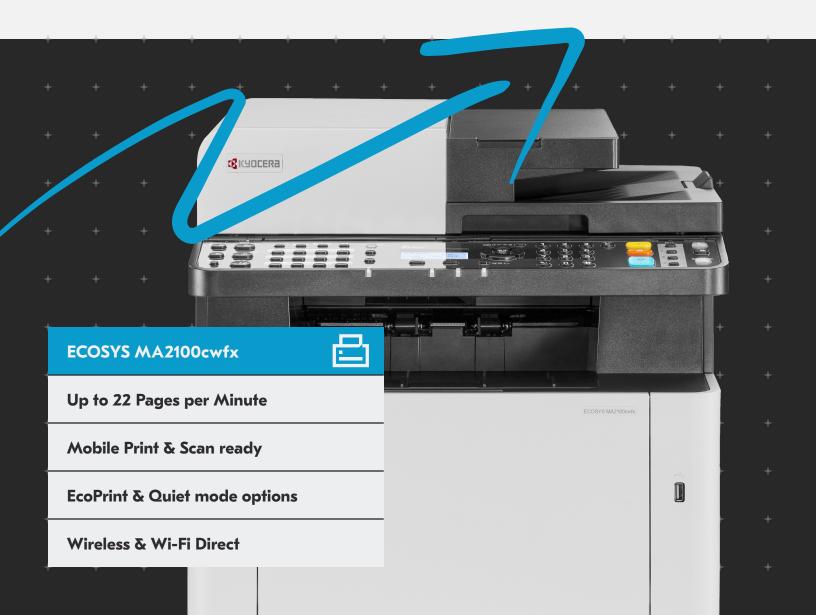

ECOSYS MA2100cwfx

BASIC SPECIFICATIONS

Configuration: Color Multifunctional Printer - Print / Scan / Copy / Fax

Pages Per Minute: Black - Letter: 22 ppm, Legal: 18 ppm, A4: 21 ppm

Color - Letter: 22 ppm, Legal: 18 ppm,

A4: 21 ppm

Warm Up Time: 32 Seconds or Less (Power On), 12 Seconds or Less from Sleep

First Page Out:

Copy: 10 Seconds or Less Black, 12 Seconds or Less Color Print: 11 Seconds or Less Black, 12.5 Seconds or Less Color¹ Display: 5 Line LCD Screen with Hard Key Control Panel Resolution: 600 x 600 dpi, 9600 dpi equivalent × 600 dpi, 1200 x 1200 dpi1

Memory: Standard 512MB, Upgradable to 1.5GB **Duplex: Standard Stackless Duplex Supports Statement to** Legal (5.5"x 8.5" - 8.5"x 14"), 16 lb - 32 lb Bond (60 - 120gsm)**Dimensions:** 16.4" W x 16.9" D x 19.5" H

Weight: 57.3 lbs

Maximum Monthly Duty Cycle: 65,000 Pages per Month

POWER CONSUMPTION

Electrical Requirements: 120V, 60Hz, 8.6A; 220 - 240V, 50/60Hz, 4.5A

Typical Electricity Consumption (TEC): 120V: 811.7 Wh/week; 220 - 240V: 730 Wh/week

Maximum (including options): 120V: 1,007 W; 220 - 240V: 1,066 W

Copying / Printing: 120V: 345 W; 220 - 240V: 345 W Ready Mode: 120V: 41 W; 220 - 240V: 41 W Sleep Mode: 120V: 1 W; 220 - 240V: 1 W Power Off: 120V: 0.2 W; 220 - 240V: 0.2 W

PAPER SUPPLY

Standard Paper Sources: Single 250 Sheet Drawer, 50 Sheet Multi-purpose Tray

Standard / Maximum Paper Sources:

2 / 3 including Multi- purpose Tray

Standard / Maximum Paper Capacity:

300 Sheets / 550 Sheets

Paper Size: Standard / Optional / Drawers: 5.5" x 8.5" - 8.5" x 14" (Statement to Legal)

Paper Weight: Standard / Optional Drawers: 16 lb Bond -90 lb Index (60 - 163gsm); MPT: 16 lb Bond - 120 lb Index (60 - 220asm)

Input Materials: Standard / Optional Drawer: Plain Paper, Bond Paper, Recycled Paper; MPT: Labels, OHP, Envelopes, Coated Paper

Standard Output Tray Capacity: 150 Sheets

PRINT SPECIFICATIONSS

Standard Controller: Cortex-A9 / 800MHz PDLs / Emulations: PRESCRIBE, PCL6 (PCL5c/PCL-XL), KPDL3 supporting AES, PDF Direct Print, XPS/OpenXPS Direct Print

Windows OS Compatibility: Windows 8.1/10/11 / Server 2012 /Server 2012 R2 / Server 2016 / Server 2019

Mac OS Compatibility: Apple Macintosh OS X 10.9 or higher Interfaces: Standard: 10 BASE-T/100 BASE-TX/ 1000 BASE-T, High-speed USB 2.0, 1 USB Host, Wireless LAN IEEE 802.11b/a/n, Wi-Fi Direct

Linux OS

Mobile Printing: Apple AirPrint®, KYOCERA Mobile Print, Mopria®

Network Print and Supported Protocols: TCP/IP, IPv4, IPv6, NetBEUI, FTP, LPR, IPP, WSD Print/Scan, DHCP, DNS, Apple Boniour, LDAP, SNMP v2/3, HTTP, SMTP, POP3, PDF Direct Print (using KYOCERA NET Direct Print utilities)

Drivers: KX Driver, KX Driver for XPS, PCL Mini Driver, KPDL Mini Driver, Network Fax Driver, TWAIN Driver, WIA Driver, MAC Driver, Linux Driver

Utilities: KYOCERA Net Direct Print, File Management Utility, KYOCERA Mobile Print, KYOCERA Print Center, KYOCERA Device Manager, KYOCERA Net Viewer, ID Register, Wi-Fi Setup Tool, Remote Work Assistant, KYOCERA Quick Scan. Status Monitor

Additional Print Features: EcoPrint; Quick Copy² and Job Storage²; Private Print³ and Proof and Hold³

SCAN SPECIFICATIONS

Scan Type: Color and Black & White Scanner Scan Resolution: 300 x 600 dpi, 300 dpi, 600 dpi Scanning Functions: Scan to Folder (SMB), Scan to Email, Scan

to FTP, Scan to FTP over SSL, WSD Scan, Scan to USB, TWAIN/

File Formats: TIFF, PDF, High-compression PDF, XPS, OpenXPS, JPEG, Encrypted PDF, PDA/A-1

Scan Speeds through ADF:

Mono: Simplex @300 dpi - 30 ipm, @600 dpi - 18 ipm Color: Simplex @300 dpi - 23 ipm, @600dpi - 6 ipm

Original Size: Through Document Processor: Statement to Legal (5.5" x 8.5" - 8.5" x 14"); Glass: Up to 8.5" x 11"

COPY SPECIFICATIONS

Image Mode: Text, Photo, Text & Photo, Graphic/Map, Printed **Document Mode**

Continuous Copy: 1-999 / Auto Reset to 1

Job Management: Job Accounting, 20 Department Codes, Shortcut Kevs

Magnification / Zoom: Full Size, 7 Reduction, 5 Enlargement, Preset Ratios, 25 - 400% (in 1% increments) Additional Copy Features: Auto Zoom

SECURITY SPECIFICATIONS

Standard: Local Authentication, Network Authentication, IPsec, SNMPv3, LDAP over SSL, IEEE 802.1x, IPP over SSL/ TLS, HTTPS, FTP over SSL/TLS, SMTP over SSL/TLS, POP3 over SSL/TLS, Enhanced WSD over SSL/TLS, TLS 1.2, SMBv3, SHA-2 384

Optional: Card Authentication Kit (B)

DOCUMENT PROCESSOR

Type / Capacity: Standard Automatic Document Feeder (ADF) /50 Sheets

Acceptable Originals: Statement to Legal (5.5" x 8.5" - 8.5" x 14")

Acceptable Weights: Simplex: 13 - 42 lb Bond (50 - 160gsm), Duplex: 13 - 32 lb Bond (50 - 120gsm)

FAX SPECIFICATIONS

Compatibility / Data Compression: ITU-T G3 Fax / MMR. MR. MH. JBIG

Transmission Speed / Modem Speed: 3 Seconds or Less / 33.6Kbps

Fax Memory: 3.5MB

Fax Functions: Simplex Transmission / Duplex Reception, One Touch Dial (22 numbers, a maximum of 22 destinations can be registered with physical 11 numbers key & shift key), Quick Dial (100 numbers), Sequential Broadcast (100 numbers), Density Adjustment, Original Image Quality, Continuous Scan, Timer Send,

PAPER HANDLING OPTION

Fax Reports

PF-5110: 250 Sheet Paper Feed Drawer Paper Size / Weight: 5.5" x 8.5" - 8.5" x 14" (Statement to Legal) / 16 lb Bond — 90 lb Index (60 — 163gsm) Dimensions: 8 lbs Weight: 16.5" x 19" x 6"

ADDITIONAL OPTIONS

Memory: 512MB DIMM Memory, 1GB DIMM Memory SD Card: 16 / 32GB Security: Card Authentication Kit (B)

- At reduced speed
- 2 Requires optional SD Card
- 3 Requires optional Memory or SD Card

Print Management: ThinPrint (UG-33)

Specifications and design are subject to change without notice. For the latest on connectivity visit kyoceradocumentsolutions.us. ECOSYS, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Mopria is a trademark of Mopria Alliance, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their respective owners.









Kyocera Document Solutions Partner

KYOCERA Document Solutions America 225 Sand Road, PO Box 40008 Fairfield, New Jersey 07004-0008, USA Tel: 973-808-8444



kyoceradocumentsolutions.us